



IP67 Fiberglass 3 Dbi Omnidirectional Antenna 600-8000MHz 110x320

Our Product Introduction

for more products please visit us on leenzantenna.com

Basic Information

- Place of Origin: China
- Brand Name: Leenz
- Certification: RoHs
- Model Number: LZANT-10502-A
- Minimum Order Quantity: 10
- Delivery Time: 15 days
- Payment Terms: T/T
- Supply Ability: 5K per day



Product Specification

- Frequency: 600-960MHz; 960-7800MHz; 7800-8000MHz
- VSWR: <2.5/<3.0/<6.0
- Peak Gain: 3dBi/6dBi/5dBi
- Impedance: 50
- Highlight: 600-8000MHz Omnidirectional Antenna,
IP67 Omnidirectional Antenna,
3 Dbi Omnidirectional Antenna



More Images



Product Description

1. Specification

A. Electrical Characteristics

Frequency	600-960MHz	960-7800MHz	7800-8000MHz
S.W.R.	<2.5	<3.0	<6.0
Antenna Gain	3dBi	6dBi	5dBi
Polarization	Linear	Linear	Linear
Horizontal Beamwidth	360°	60-230°	60°
Vertical Beamwidth	50-100°	20-120°	20-70°
Impedance	50 Ohm	50 Ohm	50 Ohm
Max Power	50W	50W	50W

B. Material & Mechanical Characteristics


Connector Type	N connector
Dimension	Φ110*320mm
Weight	1.075Kg
Radome material	Fiberglass

C. Environmental

Operation Temperature	- 40 °C ~ + 80 °C
Storage Temperature	- 40 °C ~ + 80 °C
Rated Wind Velocity	36.9m/s
Lighting Protection	DC Ground

2. Antenna - S Parameter Test Data

2.1 VSWR

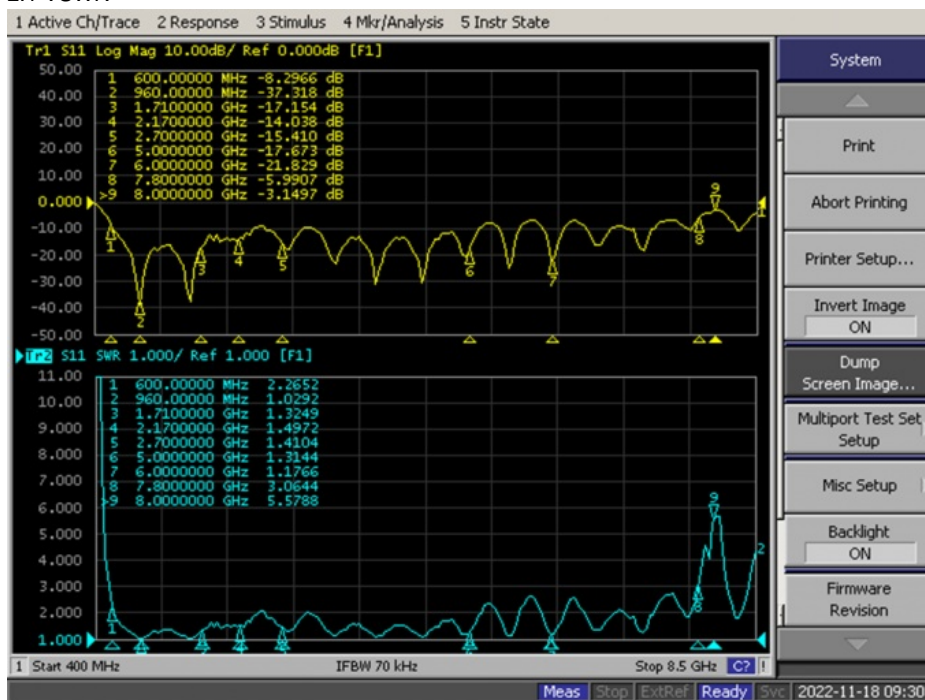



2.2 Total Efficiency & Gain:

Frequency(MHz)	Gain(dBi)	Efficiency (%)	Frequency(MHz)	Gain(dBi)	Efficiency (%)
600.0	0.27	61.27	4600.0	2.32	76.62
700.0	2.96	87.75	4700.0	2.81	78.79
800.0	1.62	80.81	4800.0	3.33	80.42
900.0	2.13	78.43	4900.0	3.25	82.32
1000.0	1.80	80.82	5000.0	2.84	73.57
1100.0	2.63	89.26	5100.0	2.96	73.22
1200.0	2.92	83.20	5200.0	3.49	76.38
1300.0	2.07	74.78	5300.0	3.90	75.87
1400.0	2.94	83.75	5400.0	4.01	75.76
1500.0	3.30	81.59	5500.0	4.26	70.52
1600.0	3.56	92.05	5600.0	4.75	71.00
1700.0	3.12	83.74	5700.0	5.73	80.14
1800.0	2.45	77.38	5800.0	5.93	77.99
1900.0	2.21	73.92	5900.0	5.91	76.29
2000.0	1.92	79.86	6000.0	5.60	69.70
2100.0	1.40	80.07	6100.0	5.36	68.28
2200.0	1.81	78.00	6200.0	5.36	72.87
2300.0	1.96	80.65	6300.0	5.43	78.21

2400.0	2.85	84.33	6400.0	5.21	77.65
2500.0	3.80	82.33	6500.0	4.43	73.09
2600.0	2.52	79.80	6600.0	4.41	73.61
2700.0	2.80	83.54	6700.0	4.18	76.04
2800.0	3.18	80.53	6800.0	4.29	77.68
2900.0	4.14	86.38	6900.0	4.75	83.76
3000.0	3.50	73.01	7000.0	4.94	80.22
3100.0	2.26	69.32	7100.0	5.30	79.30
3200.0	2.12	68.92	7200.0	5.13	78.00
3300.0	2.56	75.14	7300.0	4.71	79.00
3400.0	2.88	75.35	7400.0	5.07	85.74
3500.0	3.24	82.55	7500.0	5.23	82.78
3600.0	3.51	85.16	7600.0	5.00	79.16
3700.0	3.85	81.19	7700.0	4.79	80.30
3800.0	3.45	82.05	7800.0	4.81	79.92
3900.0	3.36	88.25	7900.0	5.02	77.99
4000.0	3.35	87.86	8000.0	4.70	68.08
4100.0	3.26	85.14	8100.0	4.63	68.50
4200.0	2.70	81.37	8200.0	4.77	70.14
4300.0	2.80	81.05	8300.0	5.19	72.39
4400.0	2.81	83.07	8400.0	5.37	76.90
4500.0	2.76	83.30	8500.0	5.02	73.20

2.3 Radiation Pattern

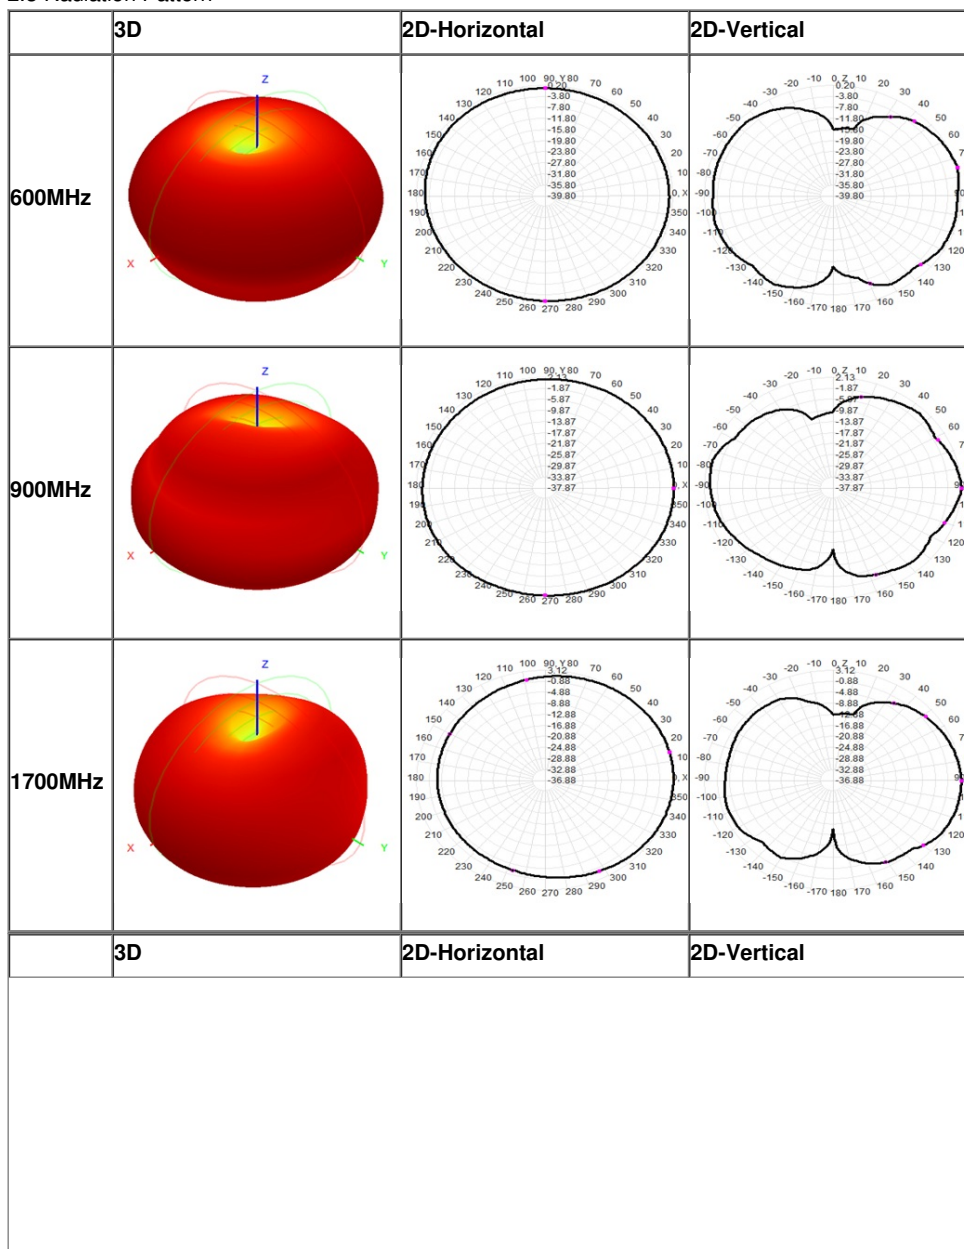

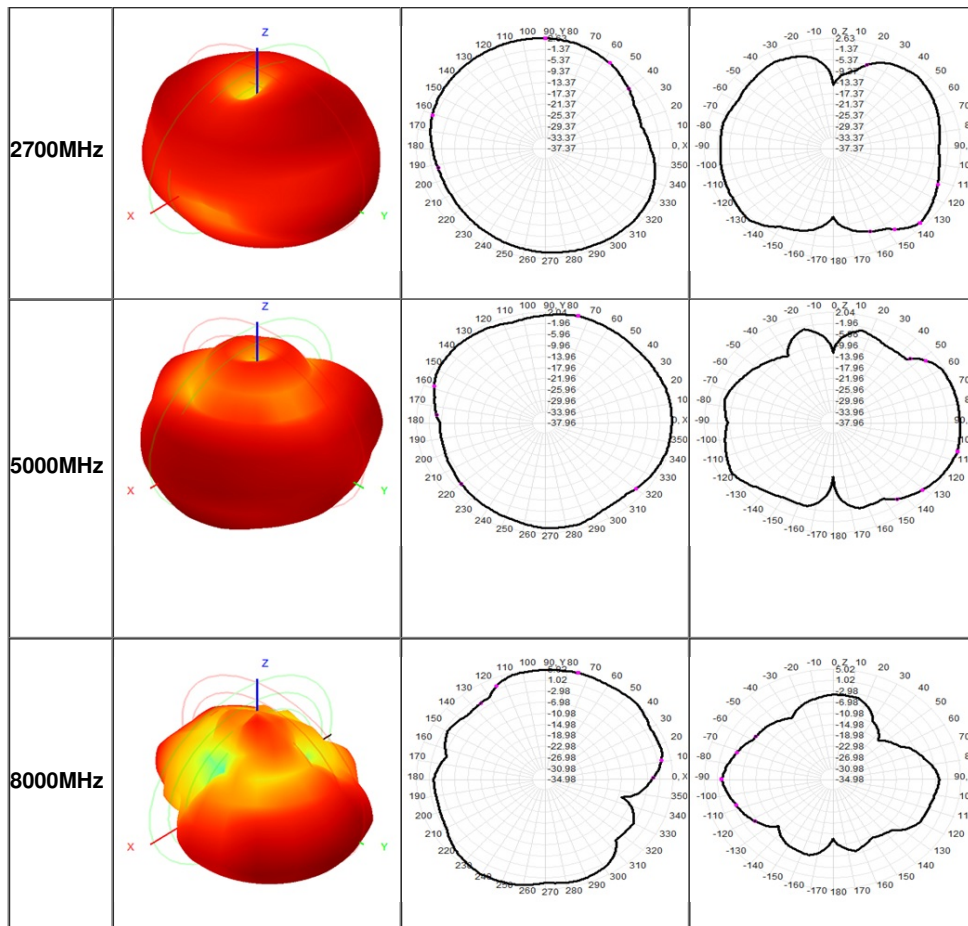

Dongguan Leenz Electronics Co., Ltd



19200261653



sale01@leenz.com



leenzantenna.com

2nd Floor, Building 1, Xinhe Industrial Park No. 162, Zhen'an East Road, Chang'an Town, Dongguan City, Guangdong Province